

Vandalism b/w dome camera

Art. no. 16044	Model name VC-VKUP90A-42043
Art. no. 14082	Model name VC-VKUP90A-60043
Art. no. 16045	Model name VC-VKUP90A-420VF
Art. no. 14084	Model name VC-VKUP90A-600VF
Art. no. 16040	Model name VC-VKUP90U-42043
Art. no. 14079	Model name VC-VKUP90U-60043
Art. no. 16041	Model name VC-VKUP90U-420VF
Art. no. 14077	Model name VC-VKUP90U-600VF
Art. no. 14090	Model name VC-KUP90-PLA160



Version	420TVL surface version / 4,3mm fixed lens
Version	600TVL surface version / 4,3mm fixed lens
Version	420TVL surface version / 4-9mm vario lens
Version	600TVL surface version / 4-9mm vario lens
Version	420TVL flush mounting version / 4,3mm fixed lens
Version	600TVL flush mounting version / 4,3mm fixed lens
Version	420TVL flush mounting version / 4-9mm vario lens
Version	600TVL flush mounting version / 4-9mm vario lens
Version	160mm Ø



Art.no.: 14090



VDE CE EMC

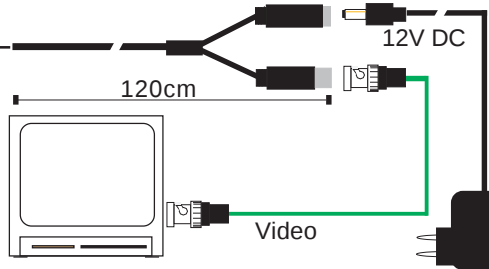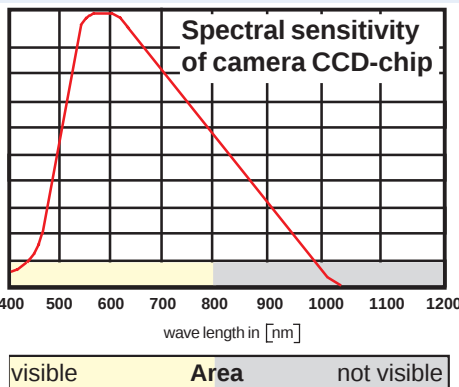

Standard packing:
Dome camera with lens and 1,2m connection cable equipped with:
DC plug and video BNC socket

Accessories:
Stabilized power supply
12V DC/400 mA art.no. 20373

Technical data

Minimum illumination:	0,05 Lux / F 1,4
Pic-up device:	1/3" CCD-Chip Sharp
Spectral sensitivity:	380 - 1100 nm wave length
Enhancer:	Horizontal
Gamma correction:	0,45 or 1 (DIP switch)
Knee function:	For edge enhancement
Signal-to-noise ratio:	> 58 dB
AGC / ALC:	28 dB / 72 dB (DIP switch)
Synchronisation:	Internal
Electr. shutter:	1/50 - 1/100000 sec. (DIP switch)
Intelligent backlight compensation:	Yes (auto) (DIP switch)
Smeareffect:	0,004%
LAG:	Zero
Scanning system:	CCIR, 625 lines, 50 Hz
Video output:	BAS 1 Vpp / 75 Ohm
Power source / consumption:	9-15 V DC, 0,1 A
Environmental temperature:	-20 up to +50 °C
Environmental humidity:	Up to 95%
Electrical safety VDE:	60065+60950
EMC:	EN 50081+82, CE certification
Impact resistant housing:	IP68 ALU diecasting
Dome glass:	Impact resistant polycarbonate
Maximum shock:	80 G
Maximum vibration:	8 G
Reattachments:	4 holes
Weight:	800 g
Measurements:	42x42 mm board
Lens holder:	12 mm screw thread
Iris:	Fixed
Focussing:	Manual (0,5 m up to unlimited)
Connections:(Video, Spg.):	1,2m video connection cable with BNC socket and 12 V DC

